



NON-ELECTRIC INITIATION SYSTEMS



KORSHUN-M

SURFACE


DESCRIPTION

Non-electric surface delay detonator consists of a length of red shock tube with a surface detonator housed in a specially designed plastic connector. The colour-coded connector for different delays is used for easy connection to shock tube.

Units of up to 1000 m spooled shock tube connected to an instantaneous detonator are available for safe blast initiation.

APPLICATION

Surface and underground in non-reactive environment.

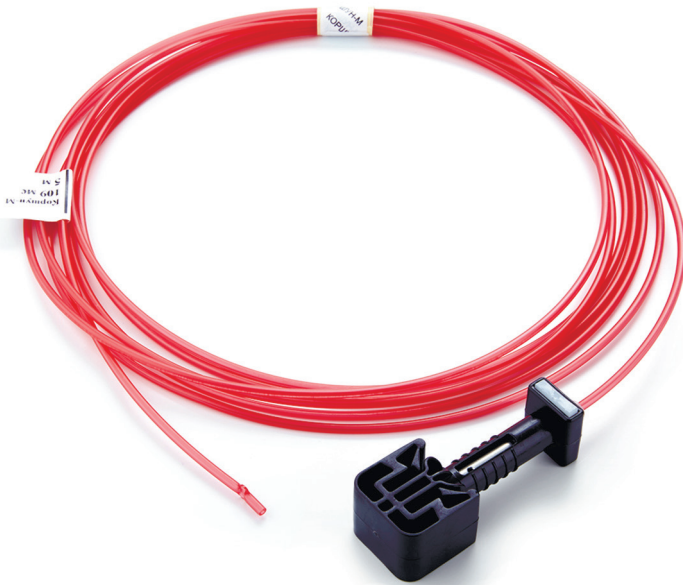

SHOCK TUBE TENSILE STRENGTH

195 N

20 KG

DETONATOR TO TUBE CRIMPING

EXPOSURE / WEIGHT

5 (±0,5) MIN

7 (±0,1) KG

SHOCK TUBE LENGTH

INCREMENT

2 TO 1200 M


1 M

APPLICATION TEMPERATURE

-50° C

+65° C

DELAY TIMING (MS)

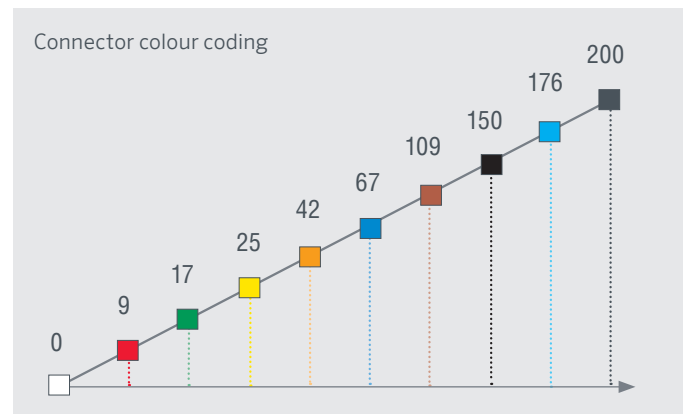

SPECIFICATION

Shock Tube diameter, mm	3,00 ± 0,015
Core load, g/m	0,012—0,018
VOD, m/s	1900 ± 100
Hydrostatic pressure resistance	1 MPa / 20 MIN



8/1 Vargi St., Moscow
117133, Russia

Phone: +7 (495)504-07-90
+7 (495) 504-07-91

www.azotvzryv.ru



NON-ELECTRIC INITIATION SYSTEMS



PACKAGING



ADR

1.1B

1.4S



UN NO.

0360

0384

Shock tube, m	Quantity per box, pcs	Gross weight, kg
3	150	7
4	160	8
5	160	9
6	160	10
7	120	9
8	100	8
9	100	8
10	100	9
50	25	9
100	6 reels	9
200	6 reels	9
300	4 reels	9
400	4 reels	13
600	2 reels	9
1000	2 reels	16

REFERENCE

Customs Tariff 3603009001

CE 0589.EXP.1411/15 (BAM)

Accessories are available upon request.

FOR FURTHER INFORMATION PLEASE CONTACT YOUR LOCAL AV GROUP REPRESENTATIVE

To be stored in a dry and ventilated storage in original boxes. Shelf life is up to 3 years in proper conditions.



8/1 Vargi St., Moscow
117133, Russia

Phone: +7 (495)504-07-90
+7 (495) 504-07-91

www.azotvzryv.ru